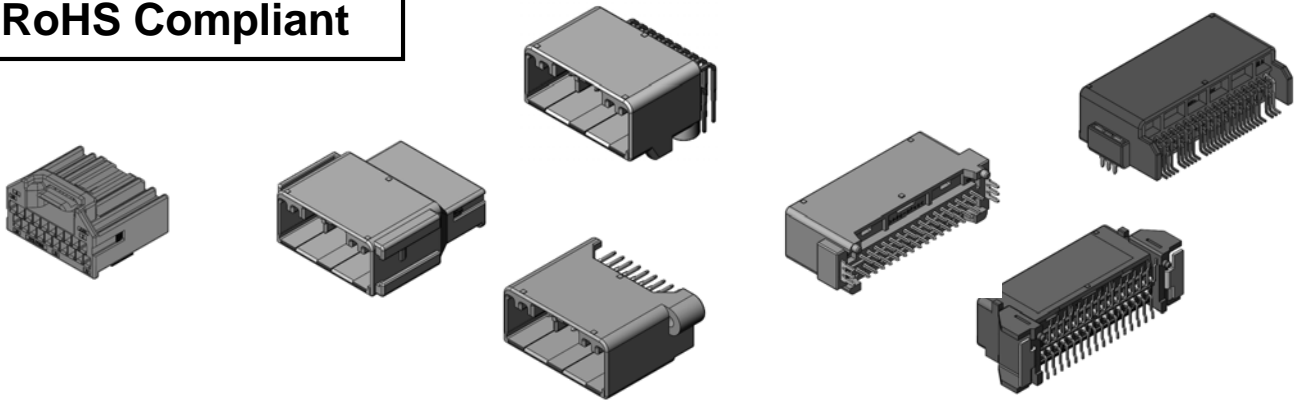


Compact Automotive Connector with 0.64mm Size Terminal CONNECTOR

MX34 Series

MB-0360-1

Jul.2020

RoHS Compliant


The MX34 series is a non-waterproof connector with a 0.64 mm size terminal that meets various requirements for automotive applications, and has been adopted for many automotive ECU applications. Since its development, a lineup for MX34 Series has been enhanced with a wide variety of variations.

Applicable Market

General purpose automotive electrical control units (ECU), battery system components for electric vehicles (EV), and Battery Management System applications (BMS)

Features

- Non-waterproof connector with 0.64mm size terminals
- Durable socket terminal that uses a 2-layer spring structure for contact area
- Retainer that detects incomplete insertion of terminals during harness work
- Bridge structure on the lock spring supports external load
- Variations for pin side is available for inline connection, and SMT or DIP mounting type for vertical and horizontal connection to board
- USCAR2 tested

General Specifications

Number of Contacts	3~40 position (please refer to next page for details)	Rated Current	3A
Contact Resistance	5mΩ max. (initial)	Insulation Resistance	100MΩ min.
	10mΩ max. (posttest)	Mating Cycles	50 times
Dielectric Withstanding Voltage	AC 1000V r.m.s for 1 minute	Operating Temperature	-40 ~+85

Ordering Information

MX34 0 03 S F *(~)

Series

Modification Code* :
Please refer to Page 5 onwards
for further details

Connector Type

- 0**: Standard
- E**: 8 position in different array
- Q**: Reflow DIP Type
- R**: SMT Type

Plating Specification F: Sn plating

Number of Contacts:
03 ~ 40 positions

Connection Type

Cable connection

S: Socket side, **P**: Pin side

Board connection (for pin side only)

Angle) N: DIP, **H**: SMT

Straight) U: Flow DIP, **T**: Reflow DIP, **V**: SMT

Product List and Mating Combinations


Number of Contacts	Socket Side		Pin Side				
	Cable connection	Cable connection	Board connection				
			Angle Flow DIP	Angle SMT	Straight Flow DIP	Straight Reflow DIP	Straight SMT
3	MX34003SF1		MX34003NF1	MX34R03HF4T			
			MX34003NF3				
5	MX34005SF1		MX34005NF1	MX34R05HF4T	MX34005UF1		
			MX34005NF3				
7	MX34007SF1	(Note 1)	MX34007NF1	MX34R07HF4T	MX34007UF1		
	MX34007SF4				MX34007UF4		
8	MX34008SF4			MX34R08HF4T			
	MX34E08SF1						
	MX34012SF1	MX34012PF1	MX34012NF1	MX34R12HF4T	MX34012UF1		MX34R12VF1
			MX34012NF3		MX34012UF3		
	MX34012SF4	-	MX34012NF4	MX34R12HF8T	MX34012UF4		
16	MX34016SF1	MX34016PF1	MX34016NF1	MX34R16HF4T	MX34016UF1		
			MX34016NF3		MX34016UF3		
20	MX34020SF1	MX34020PF1	MX34020NF1	MX34R20HF4T	MX34020UF1	MX34Q20ATF8T40	MX34R20VF1
			MX34020NF3		MX34020UF3		
24	MX34024SF1	(Note 1)	MX34024NF1	MX34R24HF4T	MX34024UF1		
	MX34024SF4		MX34024NF3		MX34024UF3		
	MX34024SF4		MX34024NF4				
28	MX34028SF1	(Note 1)	MX34028NF2	MX34R28HF4T	MX34028UF2		
			MX34028NF3		MX34028UF3		
32	MX34032SF1		MX34032NF2	MX34R32HF4T	MX34032UF2	MX34Q32BTF1	MX34R32VF1
			MX34032NF3		MX34032UF3	MX34Q32BTF1T30	
	MX34032SF4		MX34032NF4	MX34R32HF8T		MX34Q32BTF1R200	
	MX34032SF5		MX34032NF5	MX34R32HFDT		MX34Q32BTF2-1T30	
36	MX34036SF1		MX34036NF2	MX34R36HF4T	MX34036UF2		
	MX34036SF4		MX34036NF4		MX34036UF3		
40	MX34040SF1		MX34040NF2		MX34040UF2		
			MX34040NF3		MX34040UF3		

Note 1) Please use MX84 series cables, for 7, 24, and 28 cable connection including the socket side. (For MX84 series, please refer to reference number MB-0330-*.)

Materials and Finishes


Socket Housing (Cable connection)

Component	Material
Housing	PPE + PA66 (ALLOY)
Retainer	PPE + PA66 (ALLOY)

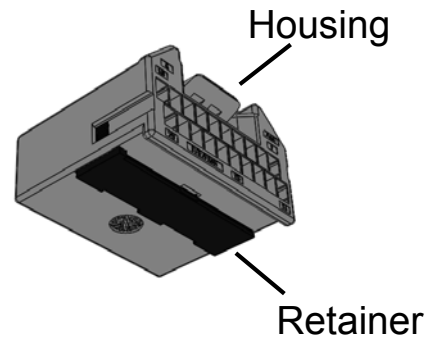


Socket Contact (Cable connection)

Component	Material / Finish
Contact	Highly Conductive Copper Alloy / Sn plating

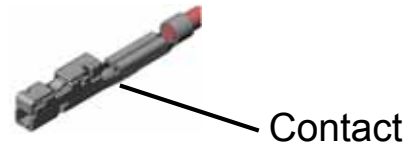


Pin Housing (Cable connection)

Component	Material / Finish
Housing	PPE + PA66(ALLOY)
Retainer	PPE + PA66(ALLOY)

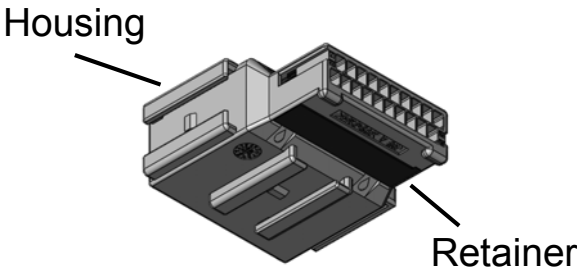


Pin Contact (Cable connection)

Component	Material / Finish
Contact	Highly Conductive Copper Alloy / Sn plating

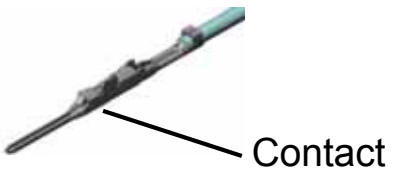


Angle Pin Header (Flow DIP)

Component	Material / Finish
Housing	SPS GF 30
Contact	Brass/ Sn plating
Hook Pin <small>*With screw hole, not available for pin count larger than 12 position</small>	Copper Alloy / Sn plating

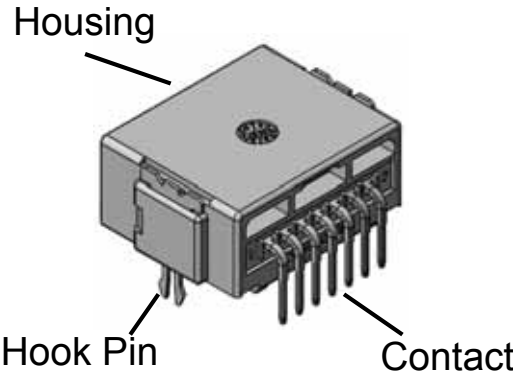

Angle Pin Header (SMT)


Component	Material / Finish
Housing	PPS GF 40
Contact	Copper Alloy / Sn plating
Leg	Brass/ Sn plating

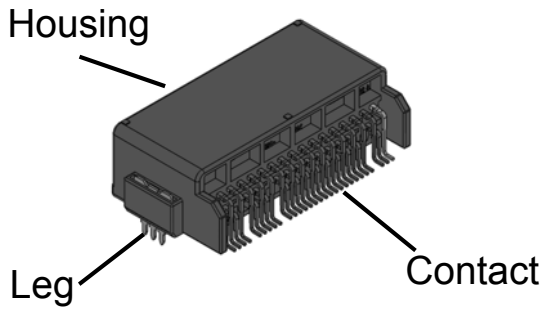

Materials and Finishes


Straight Pin Header (Flow DIP)

Components	Material / Finish
Housing	SPS GF 30
Contact	Brass / Sn plating
Hook Pin <small>*With screw hole, not available for pin count larger than 12 position</small>	Copper alloy / Sn plating

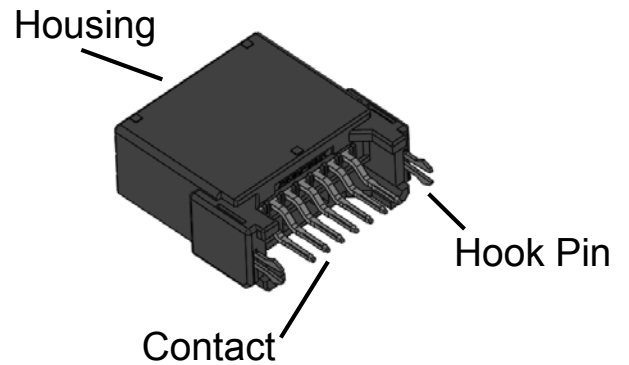


Straight Pin Header (Reflow DIP)

Components	Material / Finish
Housing	PPS GF 40
Contact	Copper alloy / Sn plating
Leg <small>*Not available for 20 position</small>	Brass / Sn plating

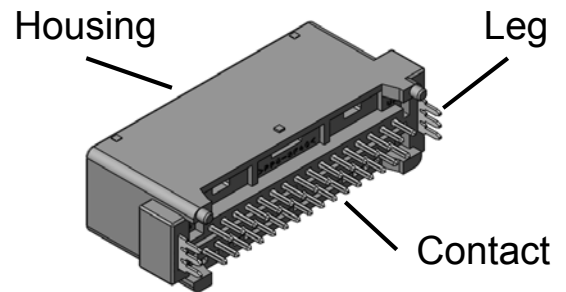

Straight Pin Header (SMT)

Components	Material / Finish
Housing	PPS GF 40
Contact	Copper alloy / Sn plating
Hold-down	Brass / Sn plating

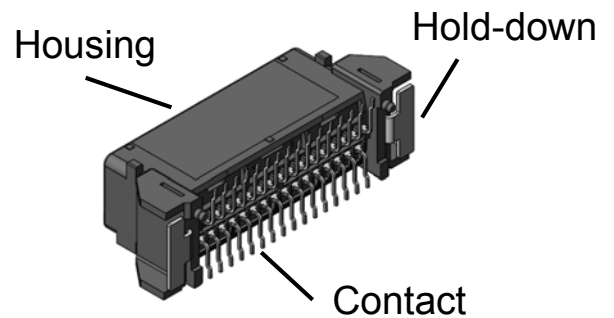

Drawing Number

Socket Housing / Pin Housing (Cable connection type)

Number of Contacts	Socket Housing			Pin Housing	
	Part Number	Drawing		Part Number	Drawing
3	MX34003SF1	SJ100823			
5	MX34005SF1	SJ100825			
7	MX34007SF1	SJ104416		(Note 1)	
	MX34007SF4 (Note 3)	SJ109859			
8	MX34008SF4	SJ109127			
	MX34E08SF1 (Note 2)	SJ106203			
12	MX34012SF1	SJ100717		MX34012PF1	SJ111563
	MX34012SF4 (Note 3)	SJ108275			
16	MX34016SF1	SJ038754		MX34016PF1	SJ112590
20	MX34020SF1	SJ038752		MX34020PF1	SJ104399
24	MX34024SF1	SJ100271		(Note 1)	
	MX34024SF4 (Note 3)	SJ107990			
28	MX34028SF1	SJ038623		(Note 1)	
32	MX34032SF1	SJ038756			
	MX34032SF4 (Note 3)	SJ114408			
	MX34032SF5 (Note 3)	SJ114627			
36	MX34036SF1	SJ100270			
	MX34036SF4 (Note 3)	SJ108316			
40	MX34040SF1	SJ038526			


Note 1) Please use MX84 series cables, for 7, 24, and 28 cable connection including the socket side. (For MX84 series, please refer to reference number MB-0330-*.)

Note 2) Basically, for the mating combination of socket side and pin side the insulators should be of the same or similar color.

However, for MX34E08~ socket side is light blue and the pin side is black.

In addition, the contact arrangement of the mating part of the MX34E08~ is different from that of the MX34008~. (See the figure below)

< MX34E08SF1 >



< MX34008SF4 >



Note 3) This product is different key mating type.

Drawing Number

Socket Contact (For cable connection type)

Part Number	Drawing	Applicable Cable
M34S75C4F1	SJ038527	AVSS 0.3mm ² , CHFUS 0.22~0.35mm ²
M34S75C4F2	SJ038528	AVSS 0.5mm ² , CHFUS 0.5~0.75mm ² CAVS 0.5mm ² , CHFS 0.75mm ²
M34S75C4F3 (Note 4)	SJ038747	CAN SD 0.35mm ²
M34S75C4F4 (Note 4)	SJ038893	AVSS 0.85mm ² , CAVS 0.85mm ²
M34S75C4F5	SJ109336	CHFUS 0.13mm ²

Note 4) M34S75C4F3 / 4 can only be inserted into the two housing cavity positions at the both ends of the connector.

(8 position type MX34E08SF1 can be inserted in all locations.)

· Handling Instruction for Crimp tool for Socket Contact is as below.

Applicable Contact	Hand Crimp Tool	Semi-automatic Applicator	Automatic Applicator
M34S75C4F1	CT150-2-MX34 (T700261)	3502-MX34D-2 (T703418)	3502-MX34D-3B (T703501)
M34S75C4F2	CT150-2B-MX34 (T700261)		
M34S75C4F5	—		
M34S75C4F3,4	CT150-2C-MX34 (T700392)	3502-MX34C-2 (Please contact us for details)	3502-MX34C-3B (Please contact us for details)

· Extraction tool for Socket Contact is “ET-MX34-1” (T711140).

Pin Contact (Cable connection type)

Part Number	Drawing	Applicable Cable (Note)
M34P75C4F1	SJ103146	AVSS 0.3mm ² , CHFUS 0.22~0.35mm ²
M34P75C4F2	SJ103147	AVSS 0.5mm ² , CHFUS 0.5~0.75mm ² CAVS 0.5mm ²
M34P75C4F5	SJ109337	CHFUS 0.13mm ²

· Handling Instruction for Crimp tool for Pin Contact is a below.

Applicable Contact	Hand Crimp Tool	Semi-automatic Applicator	Automatic Applicator
M34P75C4F1	CT150-2-MX34 (T700261)	3502-MX34D-2 (T703418)	3502-MX34D-3B (T703501)
M34P75C4F2	CT150-2B-MX34 (T700261)		
M34P75C4F5	—		

· Extraction tool for Pin contact is “ET-MX34P-1” (T711154).

Drawing Number

Angle Pin Header

Number of Contacts	Socket Housing		Angle Pin Header (Flow DIP)		Angle Pin Header (SMT)	
	Part Number	Drawing	Part Number	Drawing	Part Number	Drawing
3	MX34003SF1	Please refer to Page 5	MX34003NF1	SJ100824	MX34R03HF4T	SJ110327
			MX34003NF3 (Note 5)	SJ110997		
5	MX34005SF1	Please refer to Page 5	MX34005NF1	SJ100826	MX34R05HF4T	SJ110328
			MX34005NF3 (Note 5)	SJ116927		
7	MX34007SF1	Please refer to Page 5	MX34007NF1	SJ104514	MX34R07HF4T	SJ110662
8	MX34008SF4	Please refer to Page 5			MX34R08HF4T	SJ110338
	MX34E08SF1	Please refer to Page 5	MX34E08NF1	SJ106197		
12	MX34012SF1	Please refer to Page 5	MX34012NF1	SJ100715	MX34R12HF4T	SJ110663
			MX34012NF3 (Note 5)	SJ107602		
	MX34012SF4	Please refer to Page 5	MX34012NF4 (Note 3)	SJ118320	MX34R12HF8T (Note 3)	SJ114629
16	MX34016SF1	Please refer to Page 5	MX34016NF1	SJ038753	MX34R16HF4T	SJ110664
			MX34016NF3 (Note 5)	SJ107603		
20	MX34020SF1	Please refer to Page 5	MX34020NF1	SJ038751	MX34R20HF4T	SJ110665
			MX34020NF3 (Note 5)	SJ107604		
24	MX34024SF1	Please refer to Page 5	MX34024NF1	SJ100269	MX34R24HF4T	SJ110666
			MX34024NF3 (Note 5)	SJ107605		
	MX34024SF4	Please refer to Page 5	MX34024NF4 (Note 3)	SJ107989		
28	MX34028SF1	Please refer to Page 5	MX34028NF2	SJ106304	MX34R28HF4T	SJ119976
			MX34028NF3 (Note 5)	SJ107606		
32	MX34032SF1	Please refer to Page 5	MX34032NF2	SJ106305	MX34R32HF4T	SJ110668
			MX34032NF3 (Note 5)	SJ107607		
	MX34032SF4	Please refer to Page 5	MX34032NF4 (Note 3)	SJ114407	MX34R32HF8T (Note 3)	SJ114413
	MX34032SF5	Please refer to Page 5	MX34032NF5 (Note 3)	SJ114626	MX34R32HFDT (Note 3)	SJ114628
36	MX34036SF1	Please refer to Page 5	MX34036NF2	SJ106307	MX34R36HF4T	SJ110669
			MX34036NF3 (Note 5)	SJ107608		
	MX34036SF4	Please refer to Page 5	MX34036NF4	SJ108315		
40	MX34040SF1	Please refer to Page 5	MX34040NF2	SJ106309		
			MX34040NF3 (Note 5)	SJ107609		

Note 3) This product is different key mating type.

Note 5) Contacts for part number (~F3) is post plated, (~F1 or ~F2) is pre plated.

The only difference between the two last digits of the part number is plating.

Drawing Number

Straight Pin Header

Number of Contacts	Socket Housing		Straight Pin Header (Flow DIP)		Straight Pin Header (Reflow DIP)	
	Part Number	Drawing	Part Number	Drawing	Part Number	Drawing
5	MX34005SF1	Please refer to Page 5	MX34005UF1	SJ104369		
7	MX34007SF1	Please refer to Page 5	MX34007UF1	SJ104370		
	MX34007SF4	Please refer to Page 5	MX34007UF4 (Note 3)	SJ109858		
12	MX34012SF1	Please refer to Page 5	MX34012UF1	SJ100716		
	MX34012SF4	Please refer to Page 5	MX34012UF3 (Note 5)	SJ107610		
16	MX34016SF1	Please refer to Page 5	MX34016UF4 (Note 3)	SJ108274		
			MX34016UF1	SJ038766		
20	MX34020SF1	Please refer to Page 5	MX34020UF3 (Note 5)	SJ107611		
			MX34020UF1	SJ038765	MX34Q20ATF8T40 (Note 6)	SJ121464-1
24	MX34024SF1	Please refer to Page 5	MX34024UF3 (Note 5)	SJ107612		
			MX34024UF1	SJ100221		
28	MX34028SF1	Please refer to Page 5	MX34028UF2	SJ106312		
			MX34028UF3 (Note 5)	SJ107614		
32	MX34032SF1	Please refer to Page 5	MX34032UF2	SJ106313	MX34Q32BTF1 (Note 7)	SJ119062
			MX34032UF3 (Note 5)	SJ107615	MX34Q32BTF1T30 (Note 7)	SJ121243
					MX34Q32BTF1R200 (Note 7)	SJ121453
	MX34032SF4	Please refer to Page 5			MX34Q32BTF2-1T30 (Note 3)	SJ121244
36	MX34036SF1	Please refer to Page 5	MX34036UF2	SJ106314		
			MX34036UF3 (Note 5)	SJ107616		
40	MX34040SF1	Please refer to Page 5	MX34040UF2	SJ106315		
			MX34040UF3 (Note 5)	SJ107617		

Number of Contacts	Socket Housing		Straight Pin Header (SMT)	
	Part Number	Drawing	Part Number	Drawing
12	MX34012SF1	Please refer to Page 5	MX34R12VF1	SJ109156
20	MX34020SF1	Please refer to Page 5	MX34R20VF1	SJ106351
32	MX34032SF1	Please refer to Page 5	MX34R32VF1	SJ106352

Note 3) This product has different key mating type.

Note 5) Contacts for part number (~F3) is post plated, (~F1 or ~F2) is pre plated.

The only difference between the two last digits of the part number is plating.

Note 6) This product is fixed by the contact DIP area (without leg) only.


Please secure sufficient strength in the housing accordingly to the situation of usage before use .

Note 7) Only the packaging (stick, tray, embossed) of these 3 items are different.


Outer Dimensions

Socket Housing

Unit: mm




Note) Drawing of 20 position type

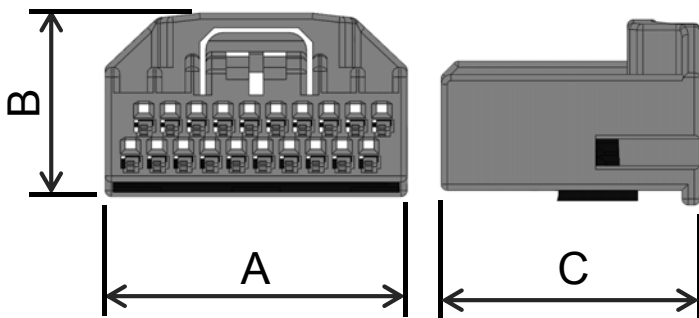


Number of Contacts	Dimension A	Dimension B	Dimension C	
3	10.8	12.2	21.3	
5	15.2			
7	19.6			
8	MX340	12.9		15.2
	MX34E	11.7		15.7
12	16.3	15.2		
16	20.7			
20	25.1			
24	29.5			
28	33.9			
32	38.3			
36	42.7			
40	47.1			

Pin Housing

Unit: mm



Number of Contacts	Dimension A	Dimension B	Dimension C
12	24.2	15.6	34.8
16	28.6		
20	33		

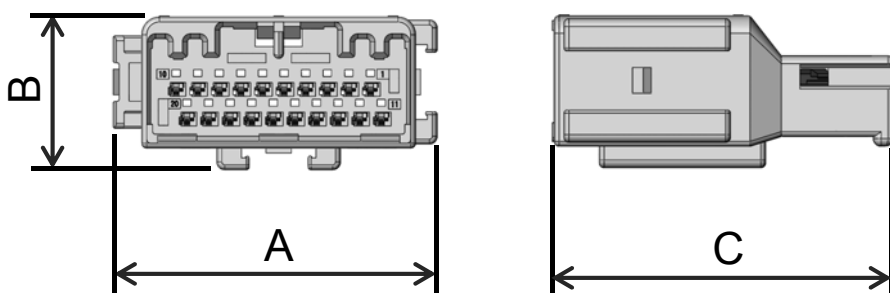


Note) Drawing of 20 position type

Outer Dimensions

Angle Pin Header (DIP)


Unit: mm

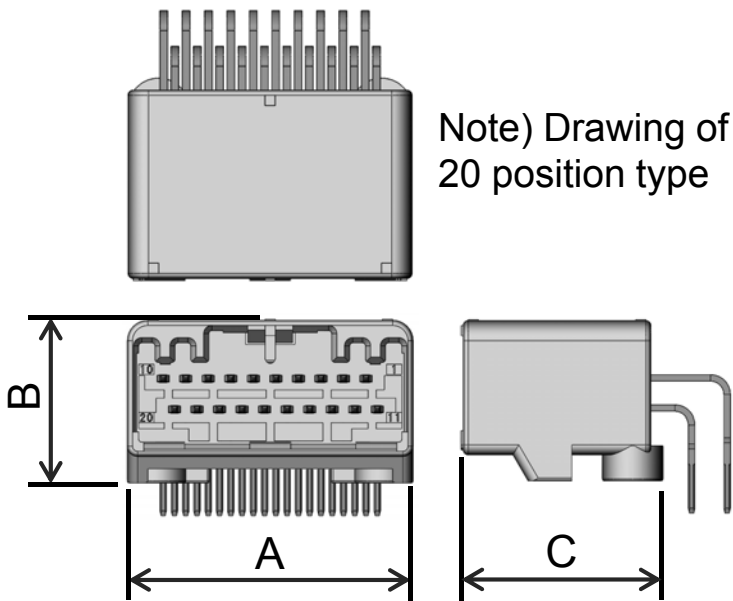

Number of Contacts	Dimension A	Dimension B	Dimension C
3	15.8	10.7	18.7
5	20.4		
7	24.8		
8 (MX34E)	18.1	14.2	18.1
12	19.1	16	19.9
16	23.5		
20	27.9		
24	32.3		
28	36.7		
32	41.1		
36	45.5		
40	49.9		

Angle Pin Header (SMT)

Unit: mm

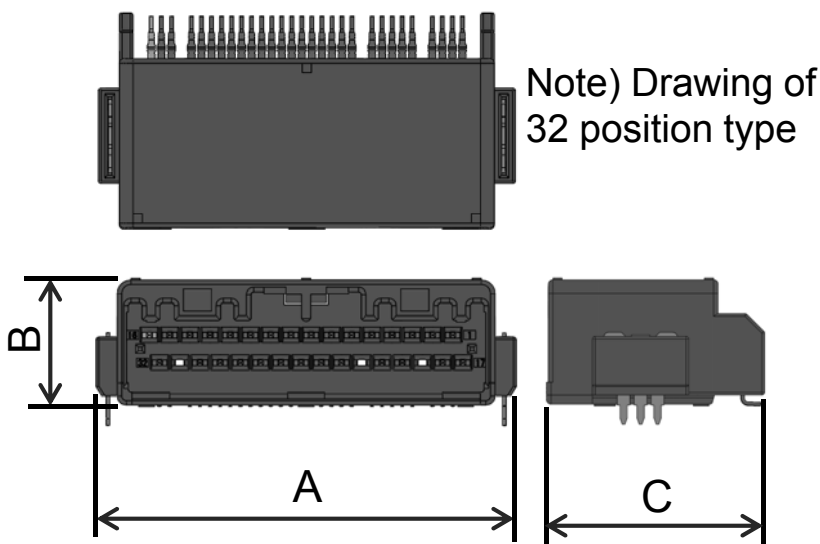


Number of Contacts	Dimension A	Dimension B	Dimension C
3	18	10.9	23.75
5	22.6		
7	27		
8	20.1	14	
12	23.7		
16	28.1		
20	32.5		
24	36.9		
28	41.3		
32	45.7		
36	50.1		


Outer Dimensions

Straight Pin Header (Flow DIP)

Unit: mm

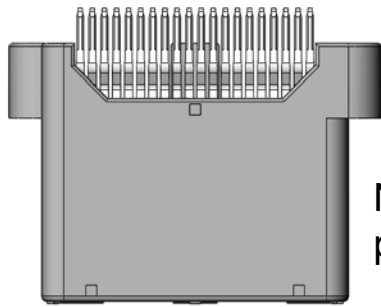


Note) Drawing of 20 position type

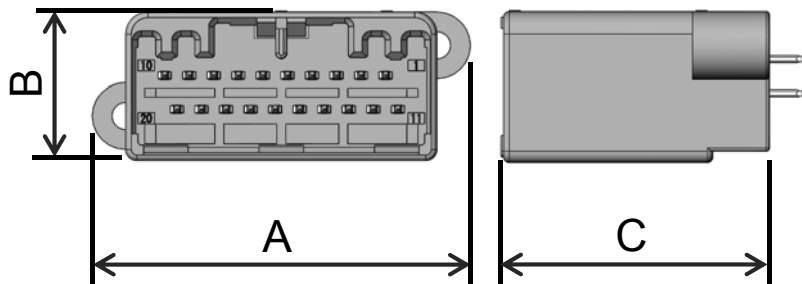


Number of Contacts	Dimension A	Dimension B	Dimension C
5	20.4	10.4	23.7
7	24.8		
12	25.1	13.4	
16	29.5		
20	33.9		
24	38.3		
28	42.7		
32	47.1		
36	51.5		
40	55.9		

Straight Pin Header (Reflow DIP)

Unit: mm

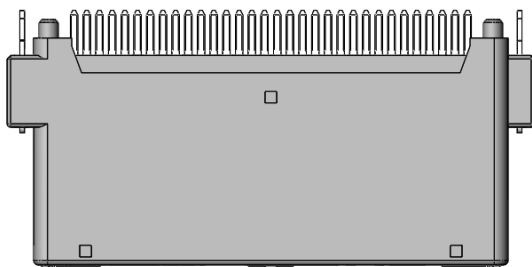

Number of Contacts	Dimension A	Dimension B	Dimension C
20	32.5	13.3	19.8
32	45.7		

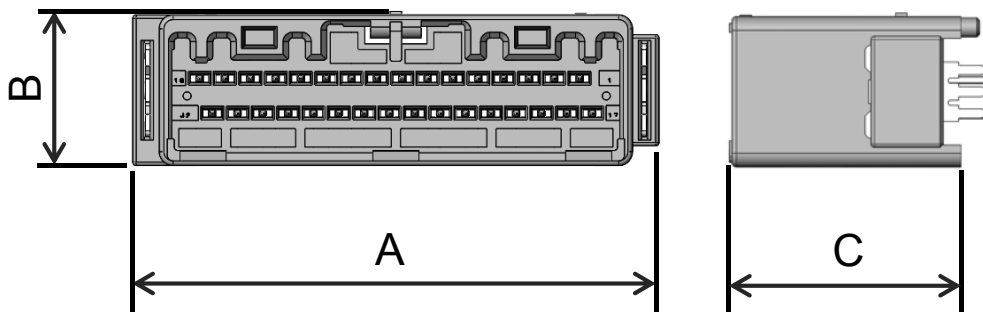


Note) Drawing of 32 position type



Outer Dimensions

Straight Pin Header (SMT)

Unit: mm

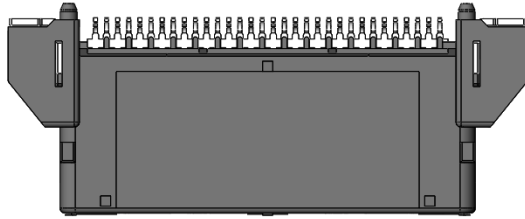

Number of Contacts	Dimension A	Dimension B	Dimension C
12	29.4	16	19.5
20	38.2		
32	51.4		

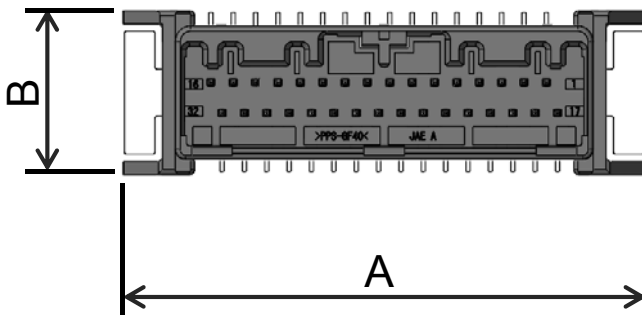

Note) Drawing of 32 position type

Technical Documents

	Specifications	Handling Instructions
Pin Housing (Cable connection)	JACS-1754-4	JAHL-1754-1
Socket SMT Type	JACS-1754-10	JAHL-1754
Others	JACS-1754	

Notice:

1. The values specified in this brochure are only for reference. The products and their specifications are subject to change without notice. Contact our sales staff for further information before considering or ordering any of our products. For purchase, a product specification must be agreed upon.
2. Users are requested to provide protection circuits and redundancy circuits to ensure safety of the equipment, and sufficiently review the suitability of JAE's products to the equipment.
3. The products presented in this brochure are designed for the uses recommended below. We strongly suggest you contact our sales staff when considering use of any of the products in any other way than the recommended applications or for a specific use that requires an extremely high reliability.
 - (1) Applications that require consultation:
 - (i) Please contact us if you are considering use involving a quality assurance program that you specify or that is peculiar to the industry, such as:
Automotive electrical components, train control, telecommunications devices (mainline), traffic light control, electric power, combustion control, fire prevention or security systems, disaster prevention equipment, etc.
 - (ii) We may separately give you our support with a quality assurance program that you specify, when you think of a use such as :
Aviation or space equipment, submarine repeaters, nuclear power control systems, medical equipment for life support, etc.
 - (2) Recommended applications include:
Computers, office appliances, telecommunications devices (terminals, mobile units), measuring equipment, audiovisual equipment, home electric appliances, factory automation equipment, etc.

Japan Aviation Electronics Industry, Limited

* The specifications in this brochure are subject to change without notice. Please contact JAE for information.