


■ 技术参数 SPECIFICATIONS


- 线数 (Poles) : 2~12(20)
- 适用线规 (Applicable wires) : AWG28#~22#
- 适应基板厚度 (Applicable PC board thickness) : 1.6mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V.Ac/Dc
- 额定电流 (Current rating) : 3A
- 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 1000V.Ac/1min
- 材料 (Material) :
 - 孔座 (Housing) : 尼龙 (PA66) UL94V-2(0)
 - 针座 (Wafer) : 尼龙 (PA66) UL94V-2(0)
 - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)

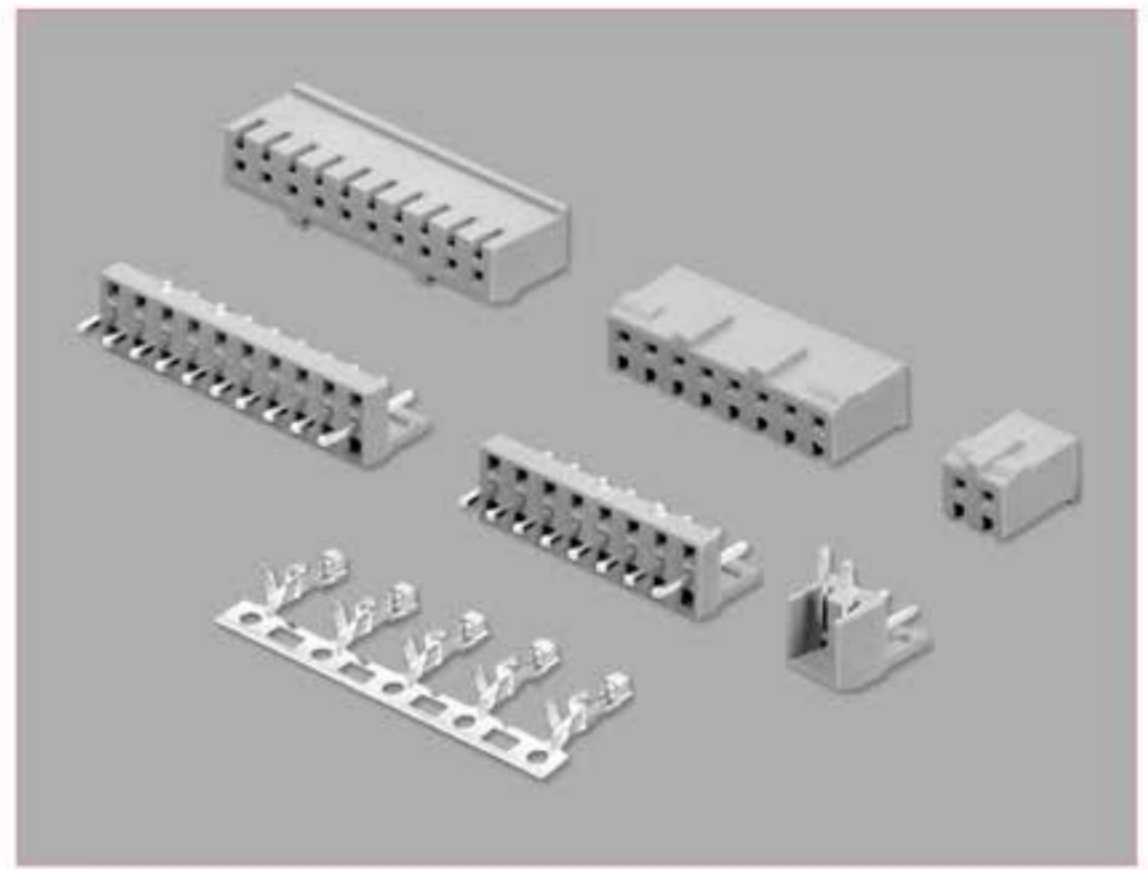


端子 TERMINAL (LGC)

型号 Type	适用线规 Applicable wires		电线外径 O.D of wire ins mm	数量 Quantity
	mm ²	AWG#		
HX25045-PT	0.08~0.3	28~22	0.9~1.5	10000PCS/盘


HX25045-PT (LGC)

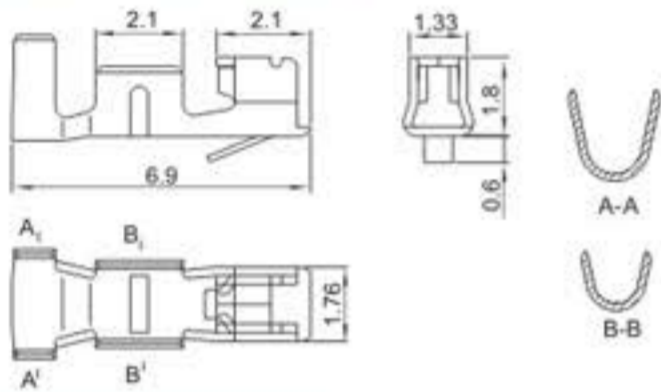


HX25045-Y (LGC)

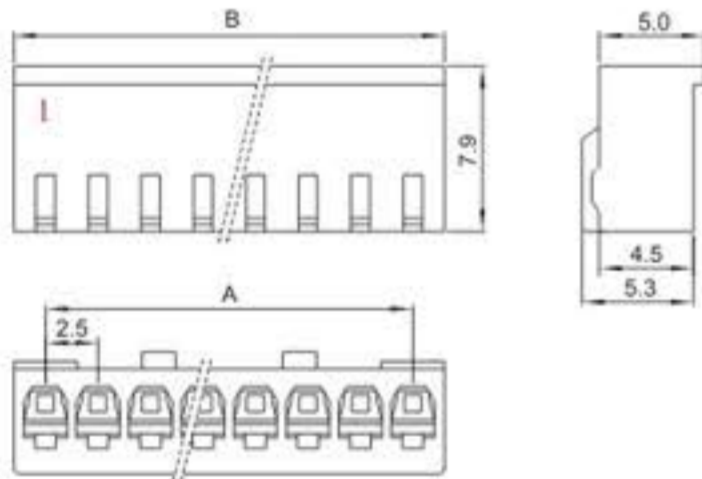


HX25046-A (LGC)

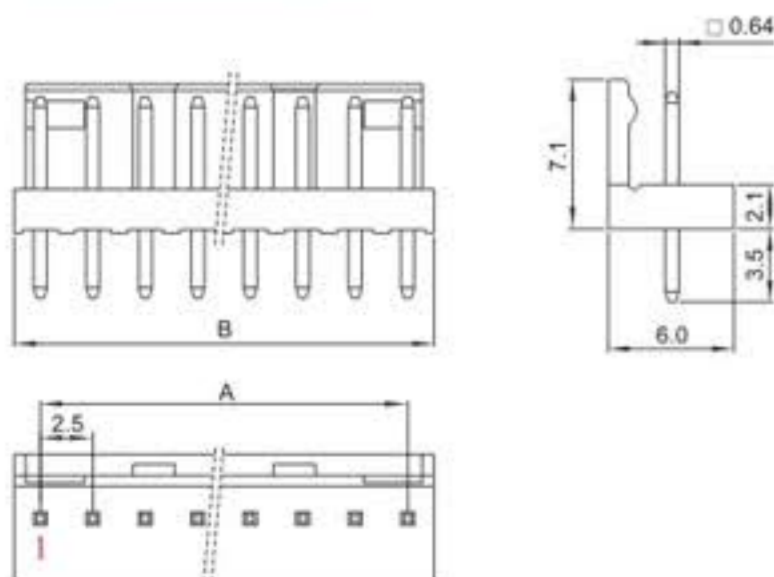

HX25046-WA (LGC)

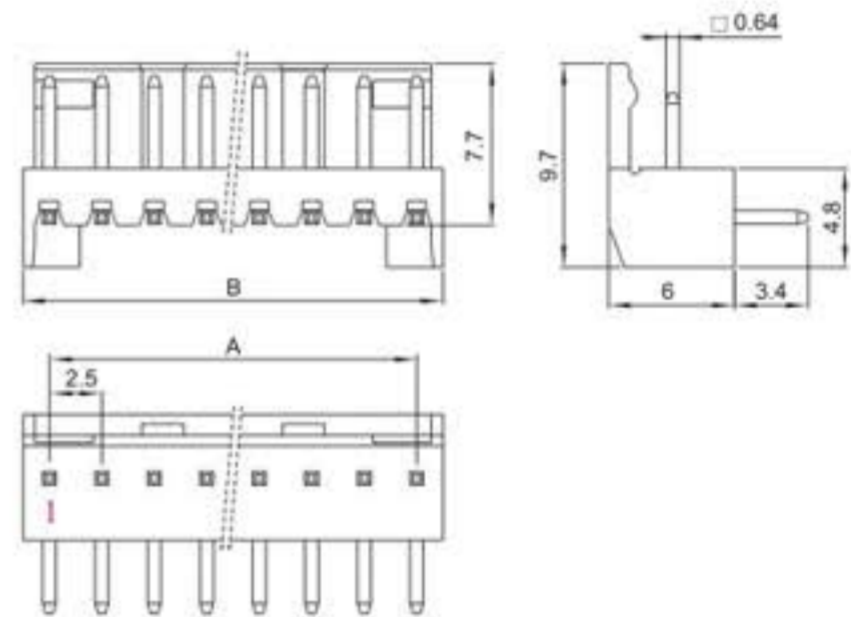

■ 安装尺寸 MOUNTING MEASUREMENT

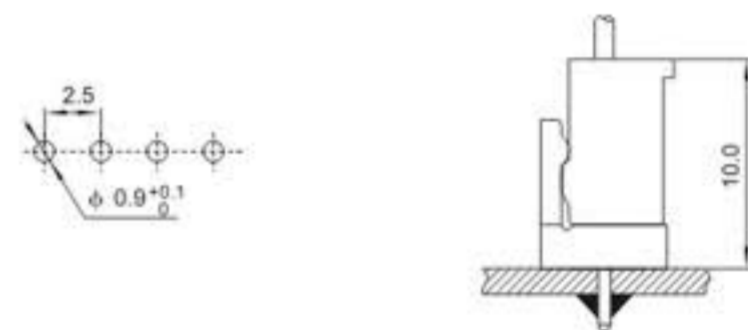

孔座 HOUSING (LGC)

线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B
2	HX25045-2Y	2.5	5.5
3	HX25045-3Y	5.0	8.0
4	HX25045-4Y	7.5	10.5
5	HX25045-5Y	10.0	13.0
6	HX25045-6Y	12.5	15.5
7	HX25045-7Y	15.0	18.0
8	HX25045-8Y	17.5	20.5
9	HX25045-9Y	20.0	23.0
10	HX25045-10Y	22.5	25.5
11	HX25045-11Y	25.0	28.0
12	HX25045-12Y	27.5	30.5
...
20	HX25045-20Y	47.5	50.5

针座 WAFER (LGC)

线数 Poles	型号 Type		尺寸Dimensions(mm)	
	直式(180°)	弯式(90°)	A	B
2	HX25046-2A	HX25046-2WA	2.5	5.0
3	HX25046-3A	HX25046-3WA	5.0	7.5
4	HX25046-4A	HX25046-4WA	7.5	10.0
5	HX25046-5A	HX25046-5WA	10.0	12.5
6	HX25046-6A	HX25046-6WA	12.5	15.0
7	HX25046-7A	HX25046-7WA	15.0	17.5
8	HX25046-8A	HX25046-8WA	17.5	20.0
9	HX25046-9A	HX25046-9WA	20.0	22.5
10	HX25046-10A	HX25046-10WA	22.5	25.0
11	HX25046-11A	HX25046-11WA	25.0	27.5
12	HX25046-12A	HX25046-12WA	27.5	30.0
...
20	HX25046-20A	HX25046-20WA	47.5	50.0